

	REVISIONS								
REV.	DESCRIPTION	DATE	APPROVED						
G	As Released	7/15/1998	SECO						



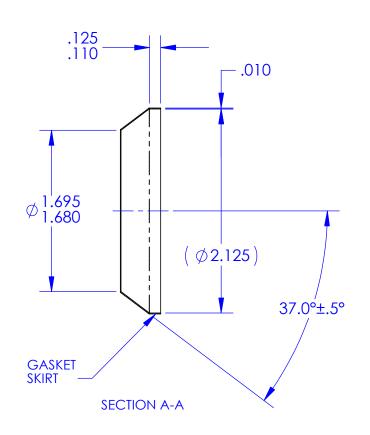

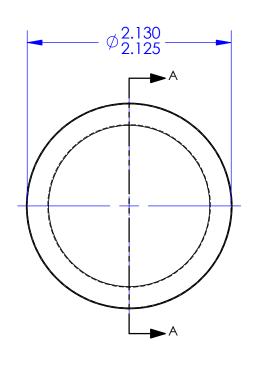

NOTES: UNLESS OTHERWISE SPECIFIED

- 1. MATERIAL: ALUMINUM ALLOY 1100 SHEET, CONDITION "0" PER QQ-A-250/1,
- 1. MATERIAL: ALUMINUM ALLOY 1100 SHEET, CONDITION "0" PER QQ-A-250/1, QQ-A-1876 OR AMS 4001.

 2. FINISH: NONE.
 3. THESE PARTS ARE ANNEALED. DIMENSIONS "A" AND "C" SHALL BEVERIFIED BY INSTALLING THE SEAL ON A STANDARD FITTING PER MS33514 OF APPROPRIATE SIZE. AN OUT-OF ROUND CONDITION WHICH DOES NOT PREVENT SUCH INSTALLATION SHALL NOT BE A CAUSE FOR REJECTION UNLESS THE SEAL MATERIAL IS CREASED OR NICKED.

 4. BREAK ALL SHARP EDGES AND REMOVE ALL BURRS.

ECCN 9A99	ECCN 9A991.d		SECO		SEALS, INC. @secoseals.com	1370 LOGAN AVE. UNIT K COSTA MESA, CA. 92626		_
See Note 1	FSCM: 4730	A		FILE NAM	e: SECO7A28			REV.
TREATMENT: Annealed after Forming	INCHES DIMENSIONS IN INCHES 3RD ANGLE PROJECTION		Conical Seal for 1 3/4" Flared Tube Fitting, 37 Degree.			STANDARD: SECO 7		
MAT'L SIZE:	3RD ANG	SLE PROJECTION	SECO 7 Seal		Joe Littel	CAGE CODE:	47	
.010 Thk. Sheet		DATE DRAWN 4/8/201	15	SCALE 1:1	CHECKED BY Jim Scott	SHEET 1	OF 1	

SECO7A28.slddrw Sht 1 of 1 SW Sht name: Sheet1